

Certified Reference Material

BAM-K008a

Diesel oil
(additive free)

Certified Value

Parameter	Value in g g ⁻¹	Uncertainty <i>U</i> ¹⁾ in g g ⁻¹
Mass fraction of the boiling range C ₁₀ – C ₄₀	0.942	0.013

¹⁾ Estimated expanded uncertainty *U* with a coverage factor of *k* = 2, corresponding to a level of confidence of approximately 95 %, as defined in the Guide to the expression of uncertainty in measurement (GUM, ISO/IEC Guide 98-3:2008).

Material Description

BAM-K008a (Lot II) is bottled in amber glass vials containing at least 2.0 mL of additive free diesel oil without FAME (fatty acid methyl esters). Figure 1 displays the GC-FID chromatogram of BAM-K008a.

Intended Use

BAM-K008a is intended to be used as a type A mineral oil of a calibration standard for the gas chromatographic determination of mineral oil hydrocarbons in water, soil and waste according to the analytical standard procedures ISO 9377-2, ISO 16703 and EN 14039. The concentration of a calibration solution prepared by dilution of BAM-K008a has to be corrected by the certified mass fraction of the boiling range C₁₀ – C₄₀.

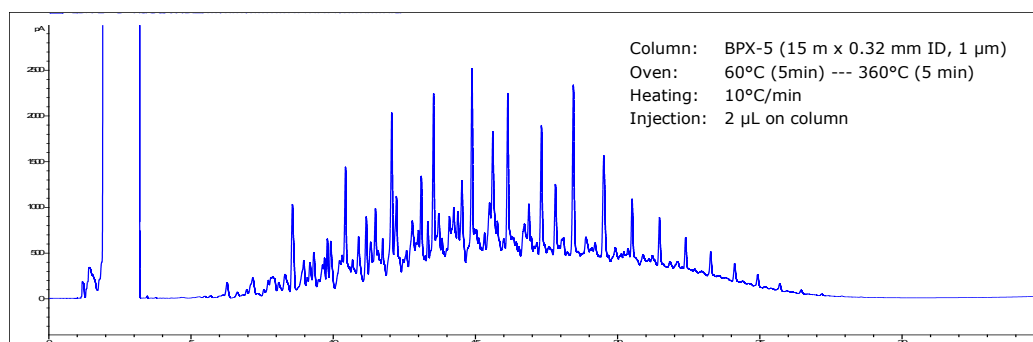


Fig. 1: GC-FID chromatogram of BAM-K008a (diluted in n-heptane)

Technical Report

A detailed technical report describing the preparation and certification of BAM-K008a is available on request or can be downloaded from the BAM website (www.bam.de).

This certificate is valid for a period of two years after dispatch of the reference material.

Lot-No. II -

Date of dispatch:

Handling

Proper use of the reference material is essential for avoiding potential harm to the user. It is strongly recommended to handle and dispose of the reference material in accordance with the guidelines for hazardous materials legally in force at the site of end use and disposal. The content of the vial is preferably used completely at once. If not, the vial should be re-sealed with a new crimp cap or remaining standard should be filled in a tightly closed glass container and stored as specified below.

Storage

BAM-K008a is to be stored tightly closed at room temperature in a dark place. If the material should become turbid by time, it should be replaced by a fresh unit and storage conditions should be checked and adjusted.

Metrological Traceability

The mass fraction of the boiling range C₁₀ - C₄₀ is traceable to a hydrocarbon reference mixture consisting of ten hydrocarbon standards (Sigma-Aldrich) with defined and confirmed purities through direct comparisons using gas chromatography with flame ionisation detection (GC-FID) and gravimetric handling. Accurate weighing is ensured using a calibrated balance.

Legal Notice

Neither BAM, its contractors nor any legal person acting on their behalf:

- (a) make any warranty or representation, express or implied, that the use of any information, material, apparatus, method or process disclosed in this document does not infringe any privately owned intellectual property rights; or
- (b) assume any liability with respect to, or for damages resulting from the use of any information, material, apparatus, method or process disclosed in this document save for loss or damage arising solely and directly from the negligence of BAM.

Accepted as BAM-CRM on April 14, 2022

Bundesanstalt für Materialforschung und –prüfung (BAM)

Dr. S. Richter
Committee for Certification

Dr. M. Koch
Project Coordinator

BAM holds an accreditation as a reference material producer according to ISO 17034. This accreditation is valid only for the scope as specified in the certificate D-RM-11075-01-00. DAkkS is a signatory of the multilateral agreement (MLA) between EA, ILAC and IAF for mutual acceptance.



This reference material is supplied by:

Bundesanstalt für Materialforschung und –prüfung (BAM)
Richard-Willstätter-Str. 11, D-12489 Berlin, Germany

Phone: +49 30 8104 2061
Fax: +49 30 8104 72061

E-mail: sales.crm@bam.de
Internet: www.webshop.bam.de